


■CELL SPECIFICATIONS


|                            |              |                     |  |
|----------------------------|--------------|---------------------|--|
| Shape / Can material       |              | Cylindrical / Steel |  |
| Typical Capacity           |              | 1200mAh             |  |
| Minimum Capacity           |              | 1100mAh             |  |
| Nominal Voltage            |              | 3.8V                |  |
| Charge Voltage             |              | 4.2V ± 0.05V        |  |
| Charge Current             |              | Less than 2.0A      |  |
| Charge Time                |              | 1.5 hrs             |  |
| Discharging current (Max.) |              | 20 A                |  |
| Discharge Cutoff Voltage   |              | 2.5V                |  |
| Temperature                | Charge       | 0°C to 45°C         |  |
|                            | Discharge    | -20°C to 60°C       |  |
|                            | Storage      | < 35°C              |  |
| Weight (Max.)              |              | 45.0g               |  |
| Dimensions                 | Diameter (D) | 18.4mm (Max)        |  |
|                            | Height (H)   | 65.2mm (Max)        |  |
| Energy                     | Volumetric   | 286 Wh/l            |  |
| Density                    | Gravimetric  | 101 Wh/kg           |  |

**Note:** The **IMR18650F** cylindrical cell consists of a lithium Manganese oxide positive electrode and a graphitic carbon negative electrode providing 3.8volts and 1200mAh. This cell design requires pack control circuitry. Various protection circuit modules are available for applications of multiple series and parallel configurations. In order to ensure safe use of cell, be sure to consult with **E-One Moli Energy** regarding charging and discharging specifications and contact E-One Moli Energy in advance when designing a device with this cell.


**Charge Characteristics**

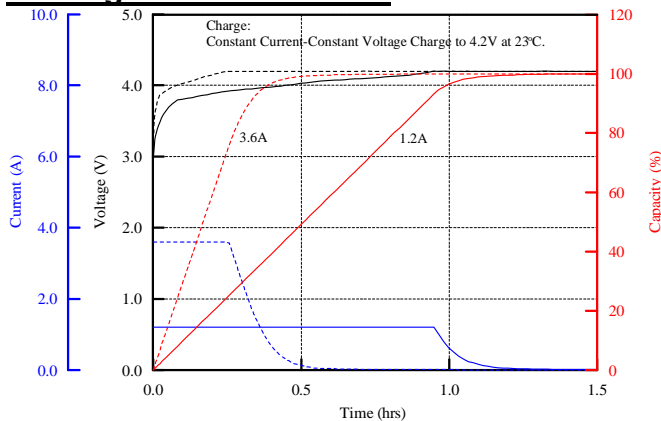


**Discharge Rate Characteristics**

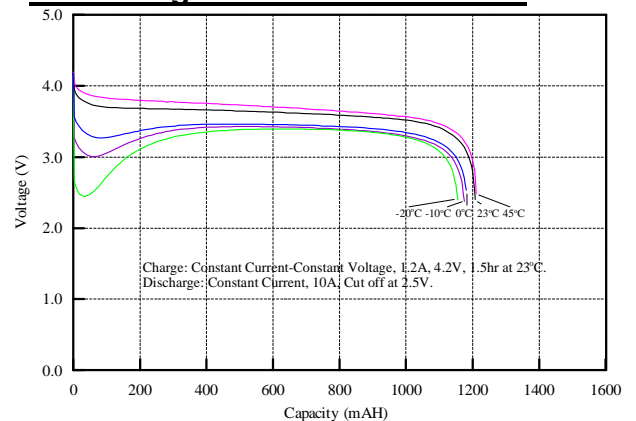

**15A, 20A Discharge and Temperature Characteristics**

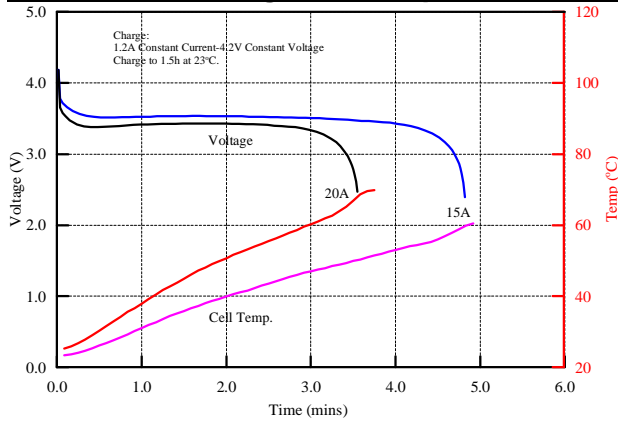

**Cycle Characteristics**

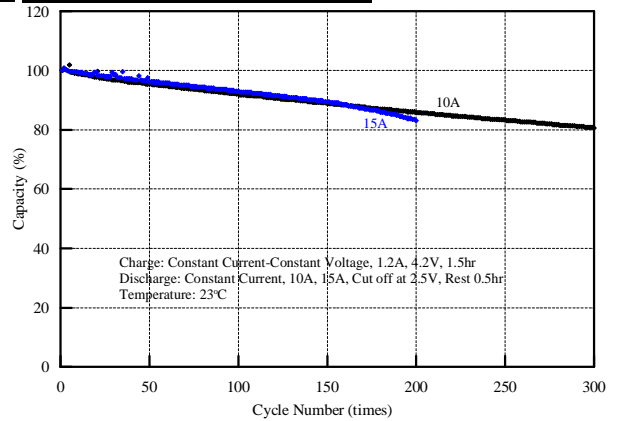

**Molicel IMR18650F Applications:**

- \* Cordless screw driver
- \* Cordless drill/driver
- \* Cordless impact driver
- \* Cordless tubing cutter
- \* Cordless angle grinder
- \* Cordless polisher/waxer
- \* Power tool

E-ONE MOLI ENERGY CORP was established in 1998 by Koo's Group. Under the brand name Molicel, E-One Moli Energy is well-recognized as a leading Li-ion battery manufacturer. To serve world-wide customers, production sites are located in Vancouver, Canada and Southern Taiwan Science Park, Tainan, Taiwan. Each site is equipped with local Research & Development and Application Service Groups.

Safety and reliability are the main strengths of E-One Moli Energy products.

We strive to provide superior energy solutions with high performance and quality products that serve our customers' needs.

**Taiwan Plant**  
10 Dali 2nd Rd., Shan-Hwa,  
Tainan County, Taiwan, R.O.C.  
Tel: 886-6-505-0666  
Fax: 886-6-505-0777  
<http://www.molicel.com>

**Canada Plant**  
20,000 Stewart Crescent  
Maple Ridge, B.C., Canada, V2X 9E7  
Tel: 1-604-466-6654  
Fax: 1-604-466-6600  
<http://www.molicel.com>

**Headquarter**  
10F, 113, Sec.2, Zhung Shan N Rd.,  
Taipei, Taiwan, R.O.C.  
Tel: 886-2-2567-3500  
Fax: 886-2-2567-6500

Agency: