


■CELL SPECIFICATIONS


Shape / Can material		Cylindrical / Steel	
Typical Capacity		2600mAh	
Minimum Capacity		2500mAh	
Nominal Voltage		3.7V	
Charge Voltage		4.2V ± 0.05V	
Charge Current		Less than 2.6A	
Charge Time		3.0 hrs	
Discharging current (Max.)		5.0 A (≤ 45 °C)	
		4.0 A (>45 °C)	
Discharge Cutoff Voltage		3.0V	
Temperature	Charge	0°C to 45°C	
	Discharge	-20°C to 60°C	
	Storage	<35°C	
Weight (Max.)		50g	
Dimensions	Diameter (D)	18.6mm (Max)	
	Height (H)	65.2mm (Max)	
Energy Density	Volumetric	568 Wh/l	
	Gravimetric	196 Wh/kg	

**Note:** The **ICR18650K** cylindrical cell consists of a lithium cobalt oxide positive electrode and a graphitic carbon negative electrode providing 3.7volts and 2600mAh. This cell design requires pack control circuitry. Various protection circuit modules are available for applications of multiple series and parallel configurations. For multi-cell application, the over-current protective devices (PTC or thermal fuse) is **NEEDED** on each cell or between cells connected in parallel. In order to ensure safe use of cell, be sure to consult with **E-One Moli Energy** regarding charging and discharging specifications and contact E-One Moli Energy in advance when designing a device with this cell.


**Charge Characteristics**

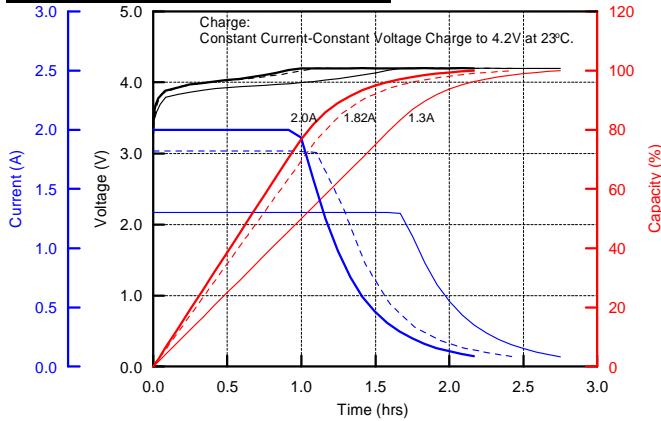


**Discharge Rate Characteristics**

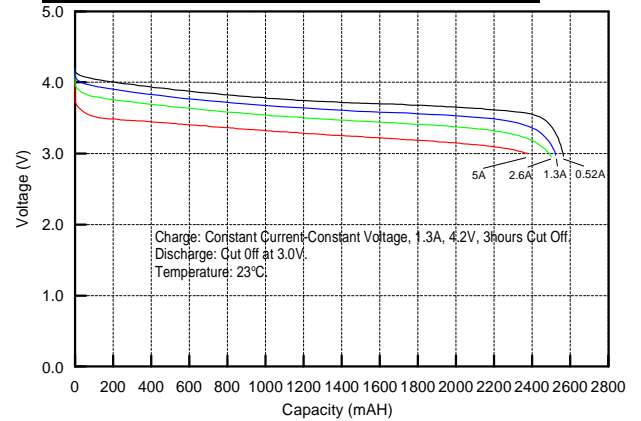

**Discharge Temperature Characteristics**

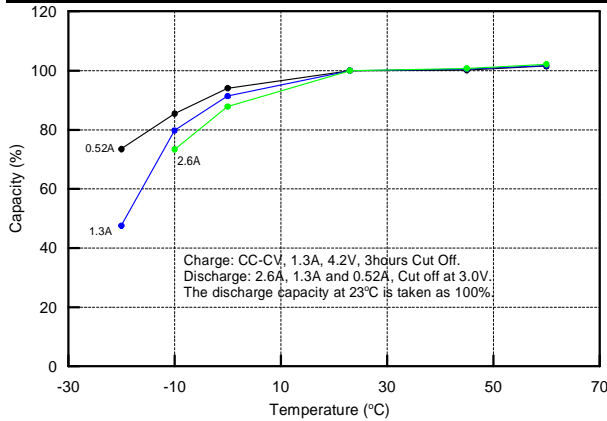

**Cycle Characteristics**

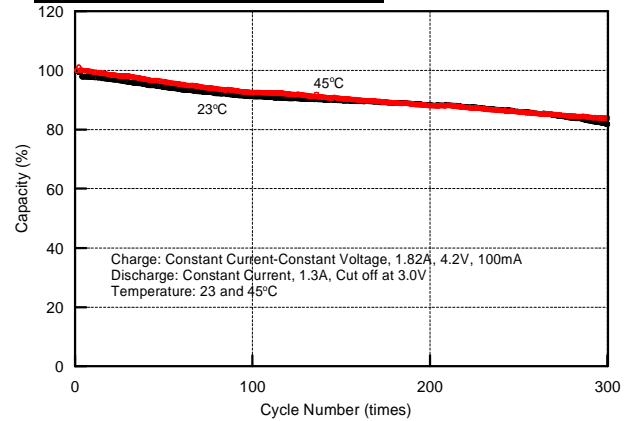

**MoliceI ICR18650K Applications:**

- \* Notebook
- \* HID handy flash
- \* Medical devices
- \* Portable VCD/DVD player
- \* Camcorder

E-ONE MOLI ENERGY CORP was established in 1998 by Koo's Group. Under the brand name MoliceI, E-One Moli Energy is well-recognized as a leading Li-ion battery manufacturer. To serve world-wide customers, production sites are located in Vancouver, Canada and Southern Taiwan Science Park, Tainan, Taiwan. Each site is equipped with local Research & Development and Application Service Groups.

Safety and reliability are the main strengths of E-One Moli Energy products.

We strive to provide superior energy solutions with high performance and quality products that serve our customers' needs.

**Taiwan Plant**  
 10 Dali 2nd Rd., Shan-Hwa,  
 Tainan County, Taiwan, R.O.C.  
 Tel: 886-6-505-0666  
 Fax: 886-6-505-0777  
<http://www.moliceI.com>

**Canada Plant**  
 20,000 Stewart Crescent  
 Maple Ridge, B.C., Canada, V2X 9E7  
 Tel: 1-604-466-6654  
 Fax: 1-604-466-6600  
<http://www.moliceI.com>

**Headquarter**  
 10F, 113, Sec.2, Zhung Shan N Rd.,  
 Taipei, Taiwan, R.O.C.  
 Tel: 886-2-2567-3500  
 Fax: 886-2-2567-6500

Agency: